



KUKKO





KS-2030-1+S/8000A


Art-No.	mm	mm	SW	drive	kg	
KS-2030-1+S/8000A	345857	90	100	13	1/4"	2,14



Art-No.	mm	inch	mm	inch	mm	SW	max. to	max. Nm	kg		
20-1+S	756221	90	3 1/8	100	4	70-140	17	614160	4,5	35	1,10



Art-No.	mm	inch	mm	inch	mm	SW	max. to	max. Nm	kg		
30-1+S	756894	90	3 1/8	100	4	70-140	17	614135	6	40	1,10

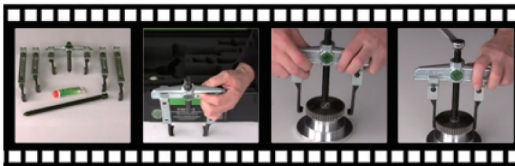


YouTube
K2030-10 S
加長型拔取器



YouTube
如何加長滑桿




YouTube
培林盤內固定器
解說

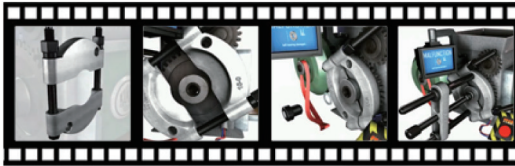

YouTube
敲擊培林
齒輪分離解說




YouTube
內卡住培林
取出解說

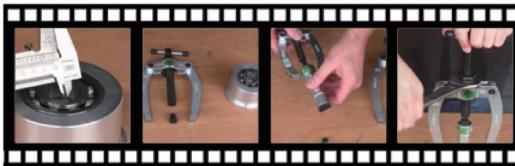

YouTube
孔內培林
取出器解說




Glide & FIX
TECHNOLOGY



橫桿和滑動零件的結合設計，確保了沿著橫桿可以更輕易地，移動培林拔取器的鉗口。

Quick adjust
TECHNOLOGY



紅色手動調節旋鈕，可以鬆動和前牽引鉗口，並配合橫桿調整。

ARMLOCK
TECHNOLOGY



橫桿鉤槽的設計，確保了最大的穩定性，更利於滑動零件的使用。